

Dalapro Facade

PRODUCT INFORMATION

Dalapro Façade is a ready-to-use repair filler for minor repairs outdoors but can also be used for indoor plastering. The product is manufactured in accordance with ISO 9001 and ISO 14001.

Instructions

Apply by hand on clean, dry and firmly attached surfaces at a minimum temperature of +10°C. Use sandpaper, particle size 100-120, when sanding the dry surface. Eye protection and dust mask are recommended when sanding. Follow your local branch regulations and recommendations.

Consumption of material

Thin coat plastering = 1 litre/ m² per mm

Drying time

The drying time is dependent on substrate, layer thickness, temperature, ventilation and atmospheric conditions.

Storage

Protect from frost and direct sunlight. The packaging is marked with best-before date. Unopened packs can be stored in 12 months.

TECHNICAL DATA


Binder:	Latex co-polymer
Solvent:	Water
Filler:	Microspheres and white dolomite
Particle size:	Max 0,2 mm
Vol. non-volatile matter:	Approx. 67%
pH:	Approx. 8
Colour:	Grey
Build:	Very high (> 8 mm)
Flammability:	Does not spread or support fire
Cleaning:	Use water for tools and spillage
Packaging:	10 l plastic bucket
Range of application:	For in- and outdoor use

Dalapro reserves the right to revise product specifications without notice. The information in this document was correct to the best of our knowledge at the time of publication. It is the end user's responsibility to ensure that it remains current prior to use.

The information in this document is for guidance only and should not be read in isolation. Users should read and familiarise themselves with all the information contained in this document and ensure that they are fully conversant with the products and systems being used before subsequent specification or installation.

For latest product information:
www.dalapro.com

Last updated 2012-02-08

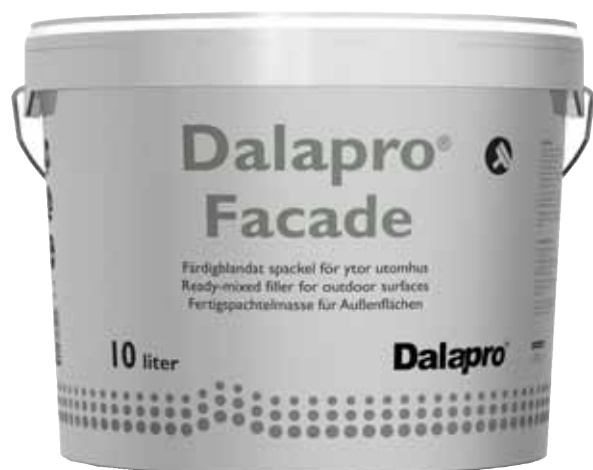

Dalapro®

phone: +46 19 46 34 00 • fax: +46 19 46 57 31 • info@dalapro.se • www.dalapro.com