


DALAPRO[®]

ROLL MAX

Ecolabel ready-mixed roller-filler with high build.

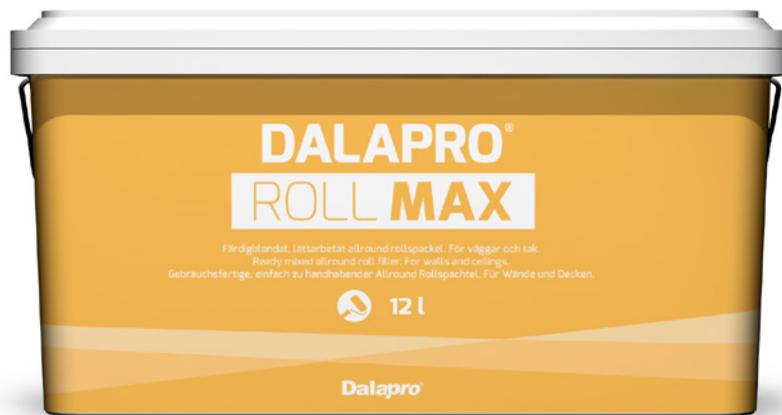

A grey low shrinkage roller-filler.

For walls and ceilings on most common substrates.

For new construction and renovation.

Provides a ready to paint surface.

**Roll application makes the smoothing easy and fast,
the work is more ergonomic correct.**

Nordic Ecolabelled.

DALAPRO® ROLL MAX

Ecolabel ready-mixed roller-filler with high build.

PRODUCT INFORMATION

Dalapro Roll Max is a grey, ready-mixed filler with a high build for roller application on all common types of indoor wall and ceiling surfaces indoors, for example plaster, concrete, wood and tiles. The product is particularly suitable for filling where extra high build is required. The smooth consistency means that the filler can be spread evenly over the entire surface without effort.

Apart from saving time, roller application of filler is also ergonomic, causing less strain on the body. The product is suitable for initial filling and thin smoothing. in both renovation and new construction.

The product fulfills CE marking requirements according to EN 15824 and is manufactured in accordance with ISO 9001 and ISO 14001.

Tools are to be cleaned in water. Large volumes of waste can be deposited as normal refuse at municipal refuse facilities. The plastic in the packaging is recyclable and must therefore be taken to the appropriate recycling point or municipal recycling plant.

INSTRUCTIONS

For roller application on clean, dry and firmly attached surfaces at a minimum temperature of +5°C. The filled surface is sanded when it has dried. Use sandpaper with particle size 100-120. Eye protection and a dust mask are recommended when sanding. Dust off before the next treatment. Filled surfaces should be primed before wall-papering.

MATERIAL CONSUMPTION

For thin smoothing with a 1 mm layer thickness: approximately 1 litre/square metre.

DRYING TIME

The drying time is dependent on factors such as substrate, layer thickness, temperature and humidity.

STORAGE

Filler has a limited shelf life and is date-marked. Un-opened packaging can be kept in a dark place, free from frost, for up to 12 months. Containers that have been opened must be sealed well. Visit dalapro.com for more information.

TECHNICAL DATA

Binding agent: Latex co-polymer

Solvent: Water

Filler: Microspheres and white dolomite


Grain size: Max. 0.35 mm

pH: Approx. 9

Colour: Grey

Flammability: Does not spread or support fire

Packaging: 12-litre plastic bucket

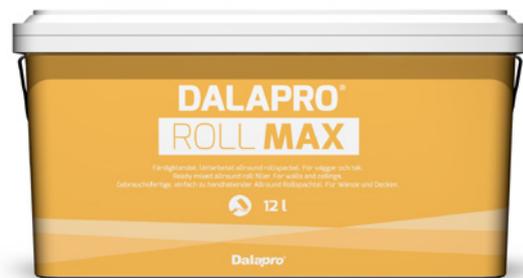

This product data sheet is provided for guidance only. The data presented does not constitute a guarantee that the product has certain properties or is suitable for a particular area of application. These values apply under normal circumstances. We reserve the right to make changes without prior notice. Users are responsible for ensuring they use the latest edition of this data sheet. Checks can be made at www.dalapro.com

Last amended 18/02/2019

Saint-Gobain Sweden AB, Scanspac
Kemivägen 7
SE-705 97 Glanshammar
+46 (0)19-46 34 00
dalapro.com
info@dalapro.com