

Dalapro DM20

PRODUCT INFORMATION

Dalapro DM20 is a white multifunctional powder product for repairs on most common substrates. Dalapro DM20 is easy to mix and provides no shrinkage. For larger projects use Dalapro Premium ready mix. The product fulfils the CE requirements according to EN 13963 and is manufactured in accordance with ISO 9001 and ISO 14001.

Instructions


Apply at a minimum temperature of +5° C. Massive or non-absorbing surfaces should be dry, cleaned and primed. Try a minor surface in order to confirm good adhesiveness to the substrate. Eye protection and dust mask are recommended when sanding the dry surface. Use sandpaper, particle size 100-120. Filled surfaces should be primed before wallpapering or painting.

Drying time

The drying time is dependent on substrate, layer thickness, temperature, ventilation and atmospheric conditions.

Storage

Protect from frost and direct sunlight. The packaging is marked with best-before date. Unopened packs can be stored in 12 months.

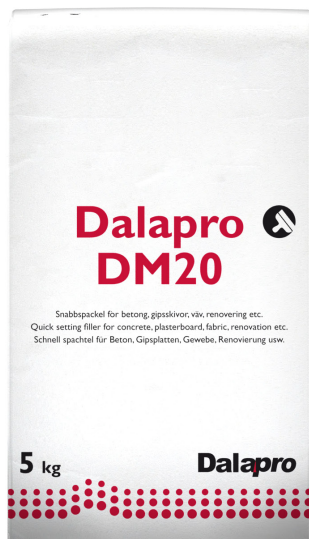

TECHNICAL DATA

Binder:	Polymer-reinforced plaster
Mixture:	1 part water - 2 parts powder. Pour the powder into the water and let "draw" for 3-5 minutes before stirring
Recommended layer thickness:	1-50 mm
Open time:	Approx. 20 min.
Colour:	White
Build:	High. Minimum shrinkage
Consumption of material:	Approx. 0.9 kg/m ² /mm
Flammability:	Does not spread or support fire
Cleaning:	Use water for tools and spillage
Packaging:	Paper bag 5 kg
Range of application:	For indoor use

Dalapro reserves the right to revise product specifications without notice. The information in this document was correct to the best of our knowledge at the time of publication. It is the end user's responsibility to ensure that it remains current prior to use. The information in this document is for guidance only and should not be read in isolation. Users should read and familiarise themselves with all the information contained in this document and ensure that they are fully conversant with the products and systems being used before subsequent specification or installation. For latest product information: www.dalapro.com

Last updated 2011-08-24

Dalapro

phone: +46 19 46 34 00 • fax: +46 19 46 57 31 • info@dalapro.se • www.dalapro.com